



3U SERIES

Fits most luminaires and especially where economical continuous lighting is needed.


Up to 75% energy saving.

Ten times the lamp life of a standard incandescent lamp.

Excellent color rendering, excellent light distribution.

Flicker free, instant start.

Universal burning position.

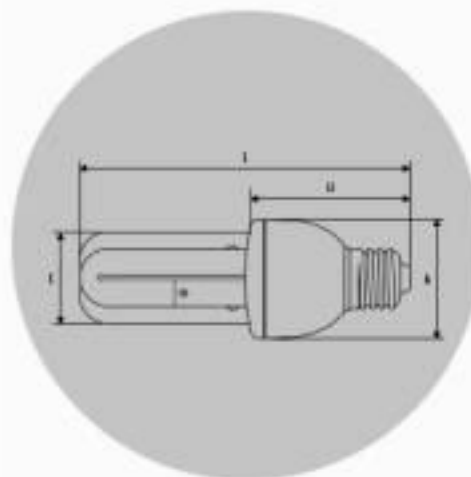

Code No.	Watts (W)	Voltage (v)	Base	Average Life (Hrs) (±)	Initial Lumens (lm)	CRI (±)	Power Factor (±)	L (mm)	LI (mm)	A (mm)	Dia. (mm)	C (mm)	Outer Carton (cm/60/PCS)			Weight (gross/kg)
													L	W	H	
AFE76	15/ELT	120/230	E27/B22	8000	770	80	0.5	139	72	48.5	12	42	66.5	28.5	18.1	10.8
	18/ELT	120/230	E27/B22	8000	950	80	0.5	149	72	48.5	12	42	66.5	28.5	19.1	11.2
	20/ELT	120/230	E27/B22	8000	1055	80	0.5	164	72	48.5	12	42	66.5	28.5	20.6	11.6
AFE155	15/ELT	120/230	E27/B22	8000	770	80	0.5	142	73	52	12	42	72.5	31	18.3	10.9
	18/ELT	120/230	E27/B22	8000	950	80	0.5	152	73	52	12	42	72.5	31	19.3	11.3
	25/ELT	120/230	E27/B22	8000	1350	80	0.5	178	73	52	12	42	72.5	31	22	12.4
	27/ELT	120/230	E27/B22	8000	1455	80	0.5	178	73	52	12	42	72.5	31	22	12.7
	30/ELT	120/230	E27/B22	8000	1620	80	0.5	188	73	52	12	42	72.5	31	23.5	12.7